

JC14 Rec'd PCT/PTO 18 DEC 2001

| | | | |
|--|--|---|---|
| FORM PTO-1390 (REV 12-29-99) | | U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE | ATTORNEY'S DOCKET NUMBER 683K US 3835 |
| TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371 | | | U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/018183 |
| INTERNATIONAL APPLICATION NO. PCT/FR00/01678 | INTERNATIONAL FILING DATE June 16, 2000 | PRIORITY DATE CLAIMED 6/18/99 and 1/18/00 | |
| TITLE OF INVENTION DEVICE AND METHOD FOR TREATING THE SOIL BY AERATION WITH WASTE | | | |
| APPLICANT(S) FOR DO/EO/US Noel GABARD | | | STORAGE |

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

- ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
- ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
- ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
- ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
- ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - ☐ has been transmitted by the International Bureau.
 - ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - ☐ have been transmitted by the International Bureau.
 - ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - ☐ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
- ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

- ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
- ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
- ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
- ☐ A substitute specification.
- ☐ A change of power of attorney and/or address letter.
- ☒ Other items or information:
 International Preliminary Examination Report.
 Abstract.
 Application Data Sheet.
 Search Report.

| | | | | | |
|---|--|---|--|--|--|
| U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 10/018183 | | INTERNATIONAL APPLICATION NO. PCT/FR00/01678 | | ATTORNEY'S DOCKET NUMBER 683K US 3835 | |
|---|--|---|--|--|--|

| <p>17. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,040.</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO 890.</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO 740.</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) 710.</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) 100.</p> <p>ENTER APPROPRIATE BASIC FEE AMOUNT =</p> <p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:15%;">CLAIMS</th> <th style="width:15%;">NUMBER FILED</th> <th style="width:15%;">NUMBER EXTRA</th> <th style="width:15%;">RATE</th> <th style="width:15%;">\$</th> <th style="width:15%;"></th> </tr> <tr> <td>Total claims</td> <td>21 - 20 =</td> <td>1</td> <td>x \$ 18.</td> <td>\$ 18</td> <td></td> </tr> <tr> <td>Independent claims</td> <td>2 - 3 =</td> <td>0</td> <td>x \$ 84.</td> <td>\$ 0</td> <td></td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ 280.</td> <td>\$</td> <td></td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$ 908</td> <td></td> </tr> <tr> <td colspan="4">Reduction of 1/2 for small entity</td> <td>\$ 454</td> <td></td> </tr> <tr> <td colspan="4">SUBTOTAL =</td> <td>\$ 454</td> <td></td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td>\$</td> <td></td> </tr> <tr> <td colspan="4">TOTAL NATIONAL FEE =</td> <td>\$ 454</td> <td></td> </tr> <tr> <td colspan="4">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</td> <td>\$</td> <td></td> </tr> <tr> <td colspan="4">TOTAL FEES ENCLOSED =</td> <td>\$ 454</td> <td></td> </tr> <tr> <td colspan="4"></td> <td>Amount to be refunded:</td> <td>\$</td> </tr> <tr> <td colspan="4"></td> <td>charged:</td> <td>\$</td> </tr> </table> | | | | CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | \$ | | Total claims | 21 - 20 = | 1 | x \$ 18. | \$ 18 | | Independent claims | 2 - 3 = | 0 | x \$ 84. | \$ 0 | | MULTIPLE DEPENDENT CLAIM(S) (if applicable) | | | + 280. | \$ | | TOTAL OF ABOVE CALCULATIONS = | | | | \$ 908 | | Reduction of 1/2 for small entity | | | | \$ 454 | | SUBTOTAL = | | | | \$ 454 | | Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). | | | | \$ | | TOTAL NATIONAL FEE = | | | | \$ 454 | | Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property + | | | | \$ | | TOTAL FEES ENCLOSED = | | | | \$ 454 | | | | | | Amount to be refunded: | \$ | | | | | charged: | \$ | <p style="text-align: center;">CALCULATIONS PTO USE ONLY</p> | |
|---|--------------|--------------|----------|------------------------|--------------|--------------|------|----|--|--------------|-----------|---|----------|-------|--|--------------------|---------|---|----------|------|--|---|--|--|--------|----|--|--------------------------------------|--|--|--|--------|--|-----------------------------------|--|--|--|--------|--|-------------------|--|--|--|--------|--|--|--|--|--|----|--|-----------------------------|--|--|--|--------|--|--|--|--|--|----|--|------------------------------|--|--|--|--------|--|--|--|--|--|------------------------|----|--|--|--|--|----------|----|---|--|
| CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | \$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total claims | 21 - 20 = | 1 | x \$ 18. | \$ 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Independent claims | 2 - 3 = | 0 | x \$ 84. | \$ 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MULTIPLE DEPENDENT CLAIM(S) (if applicable) | | | + 280. | \$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TOTAL OF ABOVE CALCULATIONS = | | | | \$ 908 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reduction of 1/2 for small entity | | | | \$ 454 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SUBTOTAL = | | | | \$ 454 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). | | | | \$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TOTAL NATIONAL FEE = | | | | \$ 454 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property + | | | | \$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TOTAL FEES ENCLOSED = | | | | \$ 454 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Amount to be refunded: | \$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | charged: | \$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

a. ☒ A check in the amount of \$ 454 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required by 37 CFR 1.16 and 1.17, or credit any overpayment to Deposit Account No. 25-0120. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

December 18, 2001

SEND ALL CORRESPONDENCE TO:

| | | |
|--|-----------------------------------|--|
| <p>Young & Thompson 745 South 23rd Street 2nd Floor Arlington, VA 22202 (703) 521-2297</p> | <p>CUSTOMER NO. 000466</p> | <p style="text-align: center;"><u>Benoit Castel</u> SIGNATURE</p> <p style="text-align: center;">Benoit Castel NAME</p> <p style="text-align: center;"><u>35,041</u> REGISTRATION NUMBER</p> |
|--|-----------------------------------|--|

10/018183

JC05 Rec'd PCT/PTO 1 8 DEC 2001
PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Noel GABARD

Serial No. (unknown)

Filed herewith

DEVICE AND METHOD FOR TREATING
THE SOIL BY AERATION WITH WASTE
STORAGE

PRELIMINARY AMENDMENT

Commissioner of Patents

Washington, D.C. 20231

Sir:

Prior to calculation of the filing fee, please amend
the above-identified application as follows:

IN THE CLAIMS:

Amend claims 3, 5-7, 10, and 13-17 as follows:

--3. (amended) A device according to claim 1,
characterised in that the lower face of the carpet comprises
at least a type of protruding elements with respect to the
general plane of the lower face.

--5. (amended) A device according to claim 1,
characterised in that the through opening (24) for the tool
comprises at least one chamfered edge and preferably the rear
rim (24') according to the forward direction of the device.

--6. (amended) A device according to claim 1,
characterised in that a deflecting member (15) is fixed to the
frame, whereas the said member is placed at the rear of the

10048183.12801

Noel GABARD

ejection area of the cores so that the ejected cores (8) are thrown back onto the receiving member.

--7. (amended) A device according to claim 1, characterised in that the receiving member comprises at least along both its free lateral edges rims (21,21',105) intended for maintaining the waste on the receiving member.

--10. (amended) A device according to claim 1, characterised in that the receiving member is modular, whereas the different modules (102,103,104,108,109) are connected together by dismountable joints (106,107).

--13. (amended) A device according to claim 11, characterised in that the lower face of the rear section (104) comprises chevrons.

--14. (amended) A device according to claim 1, characterised in that flexible carpet is made of an elastomer material, in particular a reinforced material, advantageously a reinforced polyurethane material.

--15. (amended) A device according to claim 1, characterised in that the receiving member (101) is divided to form longitudinal bands, extending from front to back, notably into two bands (108,109) hinged together by at least one dismountable joint (107).

--16. (amended) A device according to claim 10, characterised in that the dismountable joint (106,107)

1001813A-121801

Noel GABARD

consists of an elongated member linking rings that are staggered along the hinged edges of the transversal sections and/or longitudinal bands, whereby the said elongated member is a flexible cable.

--17. (amended) A device according to claim 1, characterised in that it comprises a means enabling to unfold and/or to raise the carpet.

--18. (amended) Method for implementing a device for treating soil by aeration consisting in sampling cores from the soil with tools, then in storing them in the device of claim 1 comprising a flexible carpet, characterised in that the cores ejected from the tools and falling onto the upper face of the flexible carpet, are stored (8') and in that the carpet rests on the soil by at least a section of its lower face.--

R E M A R K S

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "VERSION WITH MARKINGS TO SHOW CHANGES MADE".

Respectfully submitted,

YOUNG & THOMPSON
By Benoît Castel
Benoît Castel
Attorney for Applicant
Registration No. 35,041
745 South 23rd Street
Arlington, VA 22202
Telephone: 703/521-2297

December 18, 2001

VERSION WITH MARKINGS TO SHOW CHANGES MADE

3. A device according to claim 1 ~~or 2~~, characterised in that the lower face of the carpet comprises at least a type of protruding elements with respect to the general plane of the lower face.

5. A device according to ~~any of the previous claims~~ claim 1, characterised in that the through opening (24) for the tool comprises at least one chamfered edge and preferably the rear rim (24') according to the forward direction of the device.

6. A device according to ~~any of the previous claims~~ claim 1, characterised in that a deflecting member (15) is fixed to the frame, whereas the said member is placed at the rear of the ejection area of the cores so that the ejected cores (8) are thrown back onto the receiving member.

7. A device according to ~~any of the previous claims~~ claim 1, characterised in that the receiving member comprises at least along both its free lateral edges rims (21,21',105) intended for maintaining the waste on the receiving member.

10. A device according to ~~any of the previous claims~~ claim 1, characterised in that the receiving member is modular, whereas the different modules (102,103,104,108,109) are connected together by dismountable joints (106,107).

13. A device according to claim 11 ~~or 12~~, characterised in that the lower face of the rear section (104) comprises chevrons.

10018183124504

14. A device according to any of the previous claims claim 1, characterised in that flexible carpet is made of an elastomer material, in particular a reinforced material, advantageously a reinforced polyurethane material.

15. A device according to any of the previous claims claim 1, characterised in that the receiving member (101) is divided to form longitudinal bands, extending from front to back, notably into two bands (108,109) hinged together by at least one dismountable joint (107).

16. A device according to any of the claims 10 to 15 claim 10, characterised in that the dismountable joint (106,107) consists of an elongated member linking rings that are staggered along the hinged edges of the transversal sections and/or longitudinal bands, whereby the said elongated member is a flexible cable.

17. A device according to any of the previous claims claim 1, characterised in that it comprises a means enabling to unfold and/or to raise the carpet.

18. Method for implementing a device for treating ~~soil~~ soil by aeration consisting in sampling cores from the soil with tools, then in storing them in the device of ~~any of the previous claims~~ claim 1 comprising a flexible carpet, characterised in that the cores ejected from the tools and falling onto the upper face of the flexible carpet, are stored (8') and in that the carpet rests on the soil by at least a section of its lower face.

ABSTRACT OF THE DISCLOSURE

A device (1,1') for treating the soil by aeration includes a frame (10,10') and tools (11,12,11',12') which are moveable and which perform core boring in the ground for aeration purposes, whereby the cores (8) are ejected from the tools, the device being able to be displaced and raised, characterized in that a receiving member (2,3,101) for the cores, having through openings (23) for the tools and integral with the frame, is disposed between the soil and the ejection area of the cores so that the ejected cores are stored therein (8'). The receiving member includes a flexible belt (2) which includes raised elements and/or elements in series of chevrons (25) enabling the core holes (7) to be filled with sand. The receiving member can be modular in a transversal and/or longitudinal direction and the modules (102,103,104,108,109) are hinged to each other (106,107). Sand which accumulates at the rear of the device can be brushed afterwards.

5

10

15

10048453 121804

10/PRTS

10/018183
18 DEC 2007

Device and method for treating the soil by aeration with waste storage

This invention relates to a device and a method for treating the soil by aeration with waste storage. It finds application in the treatment of soils within the framework of their aeration or decompaction and more especially sports facilities or lawns.

In order to ensure good development of herbaceous plants on meadows or maintained lawns and, for example, on golf links, it is advisable to proceed regularly to aeration or decompaction of the soil. To this end, one uses vehicles that are generally towed and/or motorised with a great number of hollow needles, called hollow narrow spades. The hollow narrow spades are mobile and are alternately and regularly inserted in the soil, as the vehicle moves. A holding down clamp can be provided between the hollow narrow spades. The narrow spades can be inserted by an essentially vertical motion, generally caused by the transformation of a rotational movement into a translation movement. The narrow spades can also be inserted by simple rotation, on the soil, of a ballasted wheel carrying the said spades. In the latter case, the narrow spades are bent in relation to the diameter of the wheel in order to avoid a lever movement detrimental to the soil. Apart from soil treatment operations, these devices are generally raised to enable their displacement without the narrow spades contacting the soil. The hollow narrow spades enable to extract cores from the soil, cores consisting of earth and vegetables and corresponding roots. The core formed previously in a hollow narrow spade is ejected during the next core boring, whereas the said core falls onto the soil. The ejection area can be situated at the end opposite to the lower end that penetrates into the soil. However, most often, the ejection area is lateral and directed rearwards with respect to the forward direction of the device, whereas a lateral opening is provided along the narrow spade and the said narrow spade is oriented inside the device accordingly. In a second stage, these cores are collected and disposed of in order to clean the soil, whereby this disposal is particularly significant for golf links where the soil should not exhibit any obstacles or surface irregularities. Once such a device has passed, the soil therefore

exhibits a multitude of core holes arranged regularly along the forward axis of the device. In order to 'erase' the core holes that are a source of embrittlement and irregularity, the treatment of the soil must be continued by spreading sand on the surface, whereas the said sand is then swept in order to fill in the holes.

5 This method exhibits however several shortcomings. As the treatment operations are mechanised, the vehicles used are relatively heavy and as they pass, the running gear may cause deformations of the soil and more particularly after core boring because of its embrittlement. These soil treatment techniques also call for several passes, a first for core boring, a second for
10 collecting the cores and a third for spreading and brushing the sand in order to fill in the core holes. There follows a significant treatment duration during which the terrain cannot be used, not to mention the expensive cost of the treatment.

This invention enables to solve these problems thanks to a means of astonishing simplicity.

15 The invention therefore relates to a method for treating the soil by aeration, whereas the device may move in translation and be raised, whereby the device comprise a frame and tools mobile with respect to the said frame, whereas the tools are intended for sampling cores in the soil, whereas the cores are ejected from the tools in an ejection area and stored in the said
20 device.

According to the invention, the device comprises a receiving member integral with the frame and arranged between the soil and the ejection area, comprising through openings for the tools, and exhibiting an upper face and a lower face, whereas the said receiving member contains a flexible carpet
25 resting on the soil by at least a section part of its lower face, whereby the falling cores are stored on the upper face of the carpet.

In various embodiments of the invention, the following means can be used, individually or combined in all the technically possible possibilities, are implemented:

- 30
- the receiving member is fixed on the holding down clamp;
 - the receiving member is a flexible carpet, whereas the said carpet rests on the soil by at least one part of its lower face;

- the lower face of the carpet comprises elements protruding with respect to the general plane of the lower face, whereby the protruding elements, for example, spikes, chevrons or others, that may be connected, are intended for distributing the sand that might have been spread over the soil;

5 - the lower face of the carpet comprises at least a series of protruding chevrons, whereas the series of chevrons is aligned along an axis parallel to the forward axis of the device and passing through the axis of the corresponding core boring tool;

10 - the through opening for the tool comprises at least a chamfered edge and preferably the rear edge according to the forward direction of the device, which enables to do away with the passing of the sand that might have been spread over the soil, toward the upper surface of the said carpet;

15 - the through opening for the tool comprises at least an elevated edge, which enables to do away with the passing of the sand that might have been spread over the soil, toward the upper surface of the said carpet;

 - the receiving member is a rigid tray;

 - the rigid tray is hinged to the frame in order to tip the stored cores when the device is raised;

20 - a deflecting member is fixed to the frame, whereas the said member is placed at the back of the ejection area of the cores so that the ejected cores are brought back to the receiving member;

 - the receiving member comprises at least along both its free lateral edges, rims intended for holding the waste on the receiving member;

25 - at least a section of the rims intended for holding the waste on the receiving member comprises notches, enabling more particularly in the case of a carpet, to fold or bend the said carpet;

 - the rim comprises an L-shaped band, whereas the side in contact with the carpet is substantially flat and the free side is corrugated.

30 In an embodiment, the receiving member, rigid tray or flexible carpet, is specific to the mobile tools. The layout of the through openings is then suited to the spacing of the tools or the working units. Receiving members corresponding to such or such type of tool should therefore be realised.

Besides, the receiving member is subject to soil friction and hence to wear; it may also be damaged because a tool has broken or deviates or because an obstacle has been encountered.

It is therefore necessary to have an important stock of receiving
5 members, which increases the cost.

In an advantageous embodiment, the receiving member is modular, whereas its diverse constitutive modules are linked together by dismountable joints.

This embodiment may also exhibit the following characteristics,
10 considered individually or in combination:

- the receiving member is divided from front to back according to the forward direction of the device, into at least three sections, corresponding respectively to a front section, an intermediate section and a rear section, whereby the intermediate section corresponds to the area of the through
15 openings for the tools, whereas the three sections are hinged together by dismountable joints;
- the front section is fixed to a front roll;
- the intermediate section is fixed to a holding down clamp;
- the receiving member is a flexible carpet or a rigid tray;
- 20 - at least one of the sections of the receiving member is a flexible carpet;
- at least one of the sections of the receiving member is a rigid tray;
- the lower face of the front section is substantially smooth;
- the lower face of the intermediate section comprises bulges or spikes, for example of a height comprised between 2 and 10 mm, preferably in the
25 order of 4 mm;
- the lower face of the rear section comprises chevrons;
- at least one section made of a flexible carpet is made of an elastomer material, in particular a reinforced material, advantageously a reinforced polyurethane material;
- 30 - the receiving member is divided into at least two bands hinged together by at least one dismountable joint;

- at least one section is divided into at least two bands hinged together by at least one dismountable joint;

- the dismountable joint is flexible;

- the dismountable joint consists of an elongated member linking rings staggered along the hinged edges of the sections and/or bands;

- the hinged rod is a flexible cable.

The modularity of the device according to the invention may therefore be provided along two axes. A first modularity consists in dividing the receiving member transversally with respect to the forward direction of the device into several sections, for example three sections, hinged together. A second modularity consists in dividing the receiving member perpendicularly to the first modularity to form longitudinal bands hinged together and extending from front to back. Finally, these modularities may be combined, since one or several of the transversal sections forming the receiving member, can be divided into bands:

- the device comprises a safety means preventing the tools from coming down when the carpet is folded under the tools;

the carpet can be folded up for example due to the unloading of the stored cores thanks to the lifting of the tools, reverse motion and subsequent tipping of the cores;

- the safety means comprises an optical sensor and the carpet exhibits a contrast with respect to the soil, whereas the optical sensor is arranged to detect the presence of the carpet under the tools;

- the carpet is coloured and the optical sensor exhibits a wavelength filter centred on the colour of the carpet;

- the device comprises a first means enabling at least to unfold the carpet substantially flat on the soil;

the first means is useful to spread or unfold the carpet after unloading the stored cores, which operation causes the carpet to fold up;

- the first means comprises at least a cable linked to the end of a shaft integral with the frame of the device, whereas the said cable is also fixed toward the rear end of the carpet;

- the cable can be lengthened or shortened by a control, whereas the said control can be mechanical, hydraulic, electrical;

- the shaft is mobile in rotation around an interconnection point of the shaft on the said frame, whereby the said rotation is provided by a control, whereas the said control can be mechanical, hydraulic, electrical;

- the cable is fixed and the shaft is mobile in rotation;

- the cable can be elongated or shortened and the shaft is fixed;

- the cable can be elongated or shortened and the shaft is mobile in rotation;

- the shaft of the first means can be elongated or shortened;

- the first means enables moreover to raise the carpet so that the latter does not rest on the soil any longer when the tools are raised and the soil treatment operations are finished;

raising the carpet enables the device to move freely over roads or others without the carpet slipping on the soil;

- the device comprises a means for unfolding and/or raising the carpet.

The invention also comprises a method for implementing a device for treating the soils by aeration, consisting in sampling cores in the soil using tools and in storing them in the device according to the previous characteristics and comprising a flexible carpet. The invention suggests to store the cores ejected from the tools and falling on the upper face of the flexible carpet and also to leave the carpet rest on the soil by at least one section of its lower face.

Soil can be sanded previously to core boring. The word 'previously' means that the sanding operation takes place from a previous pass of a vehicle or that the sanding takes place ahead of the core boring with the same vehicle that performs this core boring. Thus the soil treatment can be provided in two or in a single pass. In a preferred embodiment, sanding takes place previously to core boring.

According to an advantageous embodiment sweeping or brushing, both words being synonymous, takes place at the rear of the receiving member, for example using a brush located at the rear of the device.

Thanks to this invention, while enabling to store cores, the operator does not need to come back and collect the cores on the soil as it is the case in the conventional technique. The invention also enables to improve the efficiency of the soil treatment methods by modifying various steps of the method. Using a flexible carpet is particularly interesting since the carpet can follow the irregularities of the terrain and thus enables better distribution of the sand in the core holes in case when sanding takes place previously, i.e. before or ahead of the core boring. The flexibility of the carpet enables better distribution of the cores that are stored on the upper face of the carpet since the deformations of the carpet when it slips on the soil, prevent the accumulation of too significant limited batches. The flexibility of the carpet can be provided by various means: either the use of a flexible material in itself or, possibly in combination, by a particular arrangement of a rigid material and for example metal parts hinged together, metal lattice, metal coat of mail, ... The coat of mail is contemplated since sand and/or other small-sized elements that would be passed over the upper face of the carpet may then pass over the soil again through the carpet.

Finally, the invention also relates to a method for treating the soils by aeration in which cores are sampled from the soil by a core boring device and stored in the said device and according to which soil sanding takes place previously to core boring.

This invention will be illustrated better without being limited whatsoever by the following description, with reference to the appended drawings on which:

Figure 1 represents the carpet device as a side view in operating phase;

Figure 2 represents the carpet device as a side view in unloading phase;

Figure 3 represents an exploded perspective view of the assembly of a carpet on the holding down clamp;

Figure 4 represents a perspective of the upper face of a carpet;

Figure 5 represents the lower face of a carpet;

Figure 6 represents a cross-sectional view of a carpet at the level of a through opening;

Figure 7 represents the device with a rigid receiving member as a side view in unloading phase;

Figure 8 represents a roll or disc treatment device;

Figure 9 represents a disc treatment device;

Figure 10 is a perspective representation of a receiving member in several transversal sections;

5 Figure 11 is a perspective representation of a receiving member with longitudinal bands;

Figure 12 is a perspective representation of a receiving member with transversal sections and longitudinal bands;

Figure 13 details a type of joint for linking the sections and/or bands of
10 the receiving member of figures 10 to 12;

Figure 14 represents a device comprising means for unfolding and/or raising the carpet.

On figure 1, a device 1 according to an embodiment of the invention comprising a flexible carpet 2 is towed by a tractor 9. The carpet can be made
15 of any resistant and flexible material and preferably of synthetic material, reinforced or not. The device moves forward over a herbaceous soil, for example a sporting ground. A chassis 10 covers and carries the actuating means of the mobile tools 11 carrying the hollow narrow spades 12 intended for performing soil core boring. Linking is made by linking rods 91, 91' and the
20 mechanical energy is transmitted to the tractor 9 to the actuating means via a power take-off shaft 92.

On Figure 1, the device is in operating mode, where the frame 10 is lowered and the roll 13 is resting on the soil. The roll 13 may be provided on a pin with adjustable height in order to adjust the height of the frame 10 in relation
25 to the soil and hence the core depth. In a preferred embodiment, the carpet 2 is fixed to the frame 10 on the holding down clamp 14. The carpet is fixed to the lower face of the holding down clamp and in the most usual operating mode, the carpet is applied to the soil on the larger section or the whole of its lower surface since generally, and in the absence of a carpet, the holding down
30 clamp 14 slips on the soil. A single hollow narrow spade 12 is represented for reasons of simplification. The narrow spade 12 is here inserted into the soil. At right angle to each narrow spade, the receiving member comprises through

openings 24 for narrow spades. As the narrow spades are hollow, core boring can be made on a regular basis. The core 8 from a previous core boring is ejected during the following core boring. As the device progresses, with the tractor 9 in forward gear, core holes 7 are performed regularly. The cores 8
 5 ejected from the hollow narrow spades are stored 8' on the receiving member or carpet 2. At least two lateral rims 21 are provided along both free edges of the receiving member in order to hold the cores 8 stored 8' on the said member and prevent them from escaping from the said and 'soiling' the soil. In a preferred embodiment and in the case of a carpet, the substantially rigid rims
 10 comprise notches or cut-outs or any other means enabling the carpet to modify its shape according to the surface of the soil, while allowing for retention of the cores 8 stored 8'. These notches or cut-outs may form elements with overlapping edges, enabling to maintain continuous retention during folding operations or not. These means with notches are also intended for enabling the
 15 carpet to bend and fold during the unloading phase. The rear edge of the receiving member may also comprise a rim 21' (figure 4).

The cores 8 can be ejected with certain energy, whereas a deflector 15 is provided at least at the rear of the ejection area in order to drop the cores 8 on the receiving member. The deflector may be a rigid or flexible element and
 20 is fixed to the frame 10; it may extend laterally as represented on figure 1.

On figure 2 the device 1 of figure 1 is represented in its unloading phase, in which the frame 10 is in raised position and the tractor in reverse gear. Thanks to the flexibility of the carpet 2 and to notches or others of the lateral rims 21, the carpet folds up and tips the cores 8 onto the soil.

25 Figure 3 illustrates how the carpet 2 is attached to the holding down clamp 14. The carpet 2 comprises through openings 24 for the narrow spades at right angle thereto. Any type of attachment may be used, for example bolting one (or several) holding down plate 23 on the holding down clamp at least ahead of the area of the openings 24 and behind that area.

30 Figure 4 represents the carpet 2 seen from above in perspective in order to visualise the series of through openings 24 for the narrow spades and the rims 21 and possibly 21'.

Figure 5 shows the characteristics of the lower surface of the carpet 2 essentially in contact with the soil. Series of chevrons 25 are regularly arranged on that lower surface. The chevrons are protruding with respect to the general surface of the carpet 2 and are intended for guiding the sand that might have been spread previously on the soil before core boring, towards the core holes 7 in order to fill them up. In this view and in this particular embodiment, the series of chevrons 25 are provided along axes 25' passing through the openings 24 and therefore the axis of the corresponding narrow spade. It is however possible in other embodiments to provide protruding elements on the lower face of the device, carpet or rigid tray, of another type and for example spikes, toes, triangular, rectangular shapes ... in all their possible orientations enabling spreading and/or guiding of the sand. Several types of elements can be associated and for example spikes arranged ahead of the chevrons according to the operational forward direction of the device.

Figure 6 shows the chamfered edge 24', provided in the through opening 24 in order to prevent the sand that might have been spread on the soil to migrate toward the upper surface of the carpet, as a cross-sectional view along an axis 25'. That same figure shows one of the rims 21 and the chevrons are seen on diverse planes.

Figure 7 represents a particular embodiment where the receiving member consists of a rigid tray 3 attached to the frame 10. The tray 3 is arranged at such a height that it is situated between the soil, on which it may possibly rest directly and slip or indirectly by a running gear, and the ejection area of the cores 8. In a preferred embodiment, a joint 35 enables tipping and disposing of the cores stored on the tray when the device is raised and the tray is released. This joint can be placed in any position enabling to store the cores during the treatment and to tip the said. On the figure, the joint 35 is provided on the holding down clamp 14, however it is contemplated within the framework of the invention that the tray and the holding down clamp become a single part. It is also considered that the joint, instead of being ahead of the tools, is placed laterally, whereas the emptying is then performed sideways instead of rearwards. At least two rigid rims 31 are arranged along the lateral rims of the

tray 3. A running means 32 is preferably arranged towards the end of the tray. A retaining means enabling to release the tray for unloading consists, for exemplification purposes of a retaining toe 34 and a releasing lever 33. Any other control means of the tray 3 is contemplated within the framework of the invention, passive, with or without a spring-loaded elastic recall device or other, or active with a hydro-pneumatic, pneumatic, electrical control or other.

This invention can also be used with aeration devices comprising hollow narrow spades carried by a cylinder or by a series of parallel discs mounted on a towed frame or an automotive frame as represented diagrammatically on figure 8. A device 1' of the roll-type 11' on which a ballasted roll or a roll applied under pressure on the soil by active means, comprises on its surface hollow narrow spades 12' that are bent. The receiving member 2 is fixed to the frame 10'. The through openings are of sufficient length not to be an obstacle to the rotation of the narrow spades 12'. In that type of device, the displacement of the frame suffices to perform the core boring.

Figure 9 represents an exploded view of another disc-type device carrying hollow narrow spades. A section of the discs is not represented for better visualisation of the carpet. Only the wheel on the background 16 is shown, whereas the symmetrical wheel at the front has not been represented.

Figure 10 illustrates a first modularity mode of the receiving member of the device. The receiving member 101 is divided transversally with respect to the displacement direction of the direction, into three sections, a first so-called front section, a second so-called intermediate section 103 and a third so-called rear section 104. The front section 102 is linked to the intermediate section 103 via a dismountable joint 106. The intermediate section 103 is linked to the rear section 104 by another dismountable joint 106. The front section 102 is intended for attachment to the chassis or, preferably on the members linked to the roll provided ahead of the core tools. The front section 102 can be a flexible carpet or a rigid tray.

The intermediate section 103 is drilled with through openings 110 for the core tools. The intermediate section 103 can be attached to holding down clamps, but it can also be left clear in order to hug the soil. The intermediate

section 103 is preferably a flexible carpet of reinforced synthetic material and for example of the type implemented in conveyor belts. The intermediate section may comprise protruding elements on its lower face and in a preferred embodiment spikes of 2 mm to 10 mm in height, preferably approx. 4 mm in height.

The rear section 104 is preferably a flexible carpet surrounded by a rim 21, 21', 105 intended for maintaining the cores stored on the receiving member. In the case of a carpet, the rim 21, 21', 105 is a flexible device enabling folding the carpet up when tipping the stock of cores when reversing the device. In a preferred embodiment, the rim is a profiled band of relatively flexible and L-shaped synthetic material whose free side is undulated and the side in contact with the carpet is substantially flat in order to be glued, riveted or attached by any other means thereto. The undulation of the clear side ensures the necessary flexibility enabling to fold the carpet. Within the framework of the invention, it is contemplated that the rim 105 extends substantially along the receiving member and for instance to the front along the edges of the intermediate section 103 or even more to the front along the front section 102.

The rear section 104, preferably made of reinforced polyurethane, comprises at its lower face protruding elements and preferably chevrons.

As the three sections 102, 103, 104 are independent and connected together by dismountable, preferably flexible, joints in the case of a carpet, it suffices to use the specific intermediate band 103 of the tools implemented in the device. Besides, a particularly resistant material and/or a material comprising chevrons and hence relatively expensive can be used for the rear section only, since the other sections are made with more conventional and therefore cheaper materials.

Figure 11 illustrates a second modularity mode of the receiving member of the device. The receiving member 101 is divided into four longitudinal bands, two lateral bands 108 on the sides and two middle bands 109. In other embodiments, the number of bands may be different. Dismountable joints 107 connect the different bands. In the case of a carpet, the joints are preferably flexible.

Figure 12 illustrates a third modularity mode of the receiving member of the device resulting from a combination of both previous modes. The receiving member 101 is divided simultaneously into three transversal sections and into longitudinal bands. In other embodiments, only a section can be divided into bands, for example the rear section. As the rear section is made of a particularly resistant material and/or a material comprising chevrons, it is preferable in case of tear, wear or other problem, to replace only a minimum surface of the receiving member.

In an embodiment, the front section 102 will not be divided into bands, since they are little subject to wear and/or they may be made of a resistant material.

Figure 13 details a type of dismountable and flexible joint that can be used more particularly for a carpet. This joint consists of links arranged and riveted, screwed or other, to the rim of the sections and/or bands to be assembled. For the assembly, the opposite links are staggered, whereas their rings 113 are placed along a single axis along which an elongated element such as cable 112 has been inserted. Both ends of the cable comprise means enabling to block the cable so that it cannot slip out of the rings during the treatment of the soil. As the different links are independent elements attached to the carpet and a flexible cable is used, the dismountable joint is flexible and the carpet may adapt to the irregularities of the ground.

Figure 14 enables to visualise a device comprising means for unfolding and/or raising the carpet. On that figure, the device is unloading the cores, whereas the device has been raised and moved backwards. The carpet is therefore unfolded and a section of the former is therefore situated under the core boring tools. It appears therefore that if the operator lowers the device at that time, the carpet may be damaged by the tools.

In a first embodiment not represented, it is therefore contemplated to employ a sensor informing the user and/or preventing the device from falling when the carpet is folded under the tools. The sensor is preferably an optical sensor arrangement substantially in the area of the tools and oriented downward. In order to facilitate the detection, the carpet is made of a material

of natural colour or in black or coloured so that it exhibits a very important contrast with the soil. For example, the carpet may receive a coat of red or yellow fluorescent paint that jars against a conventional herbaceous soil. The sensor may comprise a filter centred on the colour of the carpet to be detected.

5 In another embodiment, active means are available to spread the carpet at least. These means are at least a cable 26 and a shaft 27 integral with the frame. The cable that is attached to the rear end of the carpet 2 is also integral with the rear end of the shaft by a fixed attachment in case when the cable is of constant length or by a sliding or winding means, for example a gear or a
10 pulley, in case when the cable length between the point of attachment to the carpet and the end of the shaft can be shortened or elongated by a control. The shaft 27 can also be fixed or mobile in rotation in order to enable spreading as well as lifting the carpet. It is also contemplated that the shaft may be lengthened. This shaft can also be common with a sweeping device towed with
15 the device and arranged on the rear section of the carpet. The shaft 27 can be single, for example a fork integral on both sides with the frame or a single shaft integral in a middle point with the frame or, still, implemented in pair. In a preferred embodiment, two shafts 27 arranged laterally are implemented and two cables are attached towards both rear and lateral ends of the carpet as
20 represented on figure 14.

The device as it has just been described can involve a flexible carpet for each of the three sections. It is also contemplated without departing from the framework of the invention that one or several of the sections are rigid, whereas the receiving member is totally a rigid tray or a combination of rigid and flexible
25 members. For example, the front and intermediate sections are rigid and the rear section flexible or, still, the front section is rigid and the intermediate and rear sections are flexible.

For exemplification purposes of materials useable for the realisation of a flexible carpet, one may quote the bands NNT 20 ECDV, NAK 12 EHDV, FAF
30 12 E of the company HABASIT France S.A., hinged by 'alligator' staples, whereas the corrugated rims intended for containing the cores are made of rubber and approx. 80 mm in height.

100-103-121001

This invention can be used according to diverse treatment methods for herbaceous soils consisting in performing aeration, then in spreading sand and in distributing the said so that it fills in the core holes. This invention is also useable according to a method in which aeration, collection and disposal of the
5 cores are performed simultaneously during a single pass. Finally, this invention can also be used according to a new method in which aeration, collection, disposal of the cores and filling the core holes with sand are carried out simultaneously during a single pass. The invention makes the sanding operation possible before core boring and collection, thereby limiting to two,
10 possibly one, the number of passes of the vehicles. The sanding at the front can be performed by any means. Generally, sand is spread over a substantially uniform thickness. However in other embodiments, sand spreading can be made via ducts connected to a sand tank and opening up substantially ahead of the hollow narrow spades, for instance after the fashion of the sanding
15 vehicles used on railways. In a preferred embodiment, the ducts open up slightly sideways with respect to the narrow spades so that core boring is carried out in a non-sanded area thereby reducing the wear and the consumption of sand. It is also possible to sand just behind the narrow spades, whereby the ducts then go through the carpet or the tray. The presence of the
20 chevrons guiding the sand downstream towards the holes also enables substantial sand savings. It is also possible to use at the rear of the storage device of the invention a conventional brush for distributing the sand.

In a preferred embodiment of the soil treatment method using the device, sanding takes place during a first pass before core boring. Thus in two passes,
25 it is possible to treat the soil, contrary to the conventional techniques where at least three passes were necessary to aerate, then to collect the cores and finally to spread and to distribute the sand. As the number of passes is reduced, the deformations of the soil under the effect of the vehicles are thereby reduced.

30 This invention can thus be used according to diverse methods for treating herbaceous soils and, for example, according to a method in which aeration, collection, disposal of the cores and filling the core holes with sand

The embodiments and implementation examples of the invention that have just been described are purely informative and may not limit the extent
5 thereof in any way.

CLAIMS

1. A device (1, 1') for treating soil by aeration, whereby the device may move transversally and be raised, the device comprises a frame (10, 10') and tools (11, 12, 11', 12') mobile with respect to the said frame, the tools are intended for sampling cores (8) in the soil, the cores are ejected from the tools in an ejection area, and stored (8') in the said device, characterised in that it comprises a receiving member integral with the frame and arranged between the soil and the ejection area, comprising through openings (24) for the tools, and exhibiting an upper face a lower face, whereas the said receiving member comprises a flexible carpet (2, 101) resting on the soil by at least one section of its lower face, whereby the falling cores are stored on the upper face of the carpet.

2. A device according to claim 1, characterised in that the receiving member is attached to a holding down clamp (14).

3. A device according to claim 1 or 2, characterised in that the lower face of the carpet comprises at least a type of protruding elements with respect to the general plane of the lower face.

4. A device according to claim 3, characterised in that the lower face of the carpet comprises at least a series of protruding chevrons (25), whereby the series of chevrons is aligned along an axis (25') parallel to the forward axis of the device and going through the axis of the corresponding core tool.

5. A device according to any of the previous claims, characterised in that the through opening (24) for the tool comprises at least one chamfered edge and preferably the rear rim (24') according to the forward direction of the device.

6. A device according to any of the previous claims, characterised in that a deflecting member (15) is fixed to the frame, whereas the said member is placed at the rear of the ejection area of the cores so that the ejected cores (8) are thrown back onto the receiving member.

7. A device according to any of the previous claims, characterised in that the receiving member comprises at least along both its free lateral edges rims (21, 21' 105) intended for maintaining the waste on the receiving member.

8. A device according to claim 7, characterised in that at least a section of the rims intended for maintaining the waste on the receiving member comprises notches.

9. A device according to claim 7, characterised in that the rim comprises
5 an L-shaped band, whereas the side in contact with the carpet is substantially flat and the free side is corrugated.

10. A device according to any of the previous claims, characterised in that the receiving member is modular, whereas the different modules (102, 103, 104, 108, 109) are connected together by dismountable joints (106, 107).

10 11. A device according to claim 10, characterised in that the receiving member is divided transversally with respect to the progress direction of the device in several sections, notably into at least three sections corresponding respectively to a front section (102), an intermediate section (103) and a rear section (104), whereby the intermediate section corresponds to the area of the
15 through openings (100) for the tools, whereby the three sections are hinged together by dismountable joints (106).

12. A device according to claim 11, characterised in that the lower face of the intermediate section (103) comprises bulges or spikes for example between 2 and 10 mm in height, preferably in the order of 4 mm.

20 13. A device according to claim 11 or 12, characterised in that the lower face of the rear section (104) comprises chevrons.

14. A device according to any of the previous claims, characterised in that flexible carpet is made of an elastomer material, in particular a reinforced material, advantageously a reinforced polyurethane material.

25 15. A device according to any of the previous claims, characterised in that the receiving member (101) is divided to form longitudinal bands, extending from front to back, notably into two bands (108, 109) hinged together by at least one dismountable joint (107).

30 16. A device according to any of the claims 10 to 15, characterised in that the dismountable joint (106, 107) consists of an elongated member linking rings that are staggered along the hinged edges of the transversal sections

and/or longitudinal bands, whereby the said elongated member is a flexible cable.

17. A device according to any of the previous claims, characterised in that it comprises a means enabling to unfold and/or to raise the carpet.

5 18. Method for implementing a device for treating soil by aeration consisting in sampling cores from the soil with tools, then in storing them in the device of any of the previous claims comprising a flexible carpet, characterised in that the cores ejected from the tools and falling onto the upper face of the flexible carpet, are stored (8') and in that the carpet rests on the soil by at least
10 a section of its lower face.

19. A method according to claim 18, characterised in that soil sanding is made previously to core boring.

20. A method according to claim 19, characterised in that sweeping or brushing takes place at the rear of the receiving member (2, 101).

15 21. A method for treating the soil by aeration in which cores are sampled from the soil by a core boring device and stored in the said device, characterised in that soil sanding is performed previously to core boring.

Fig. 1


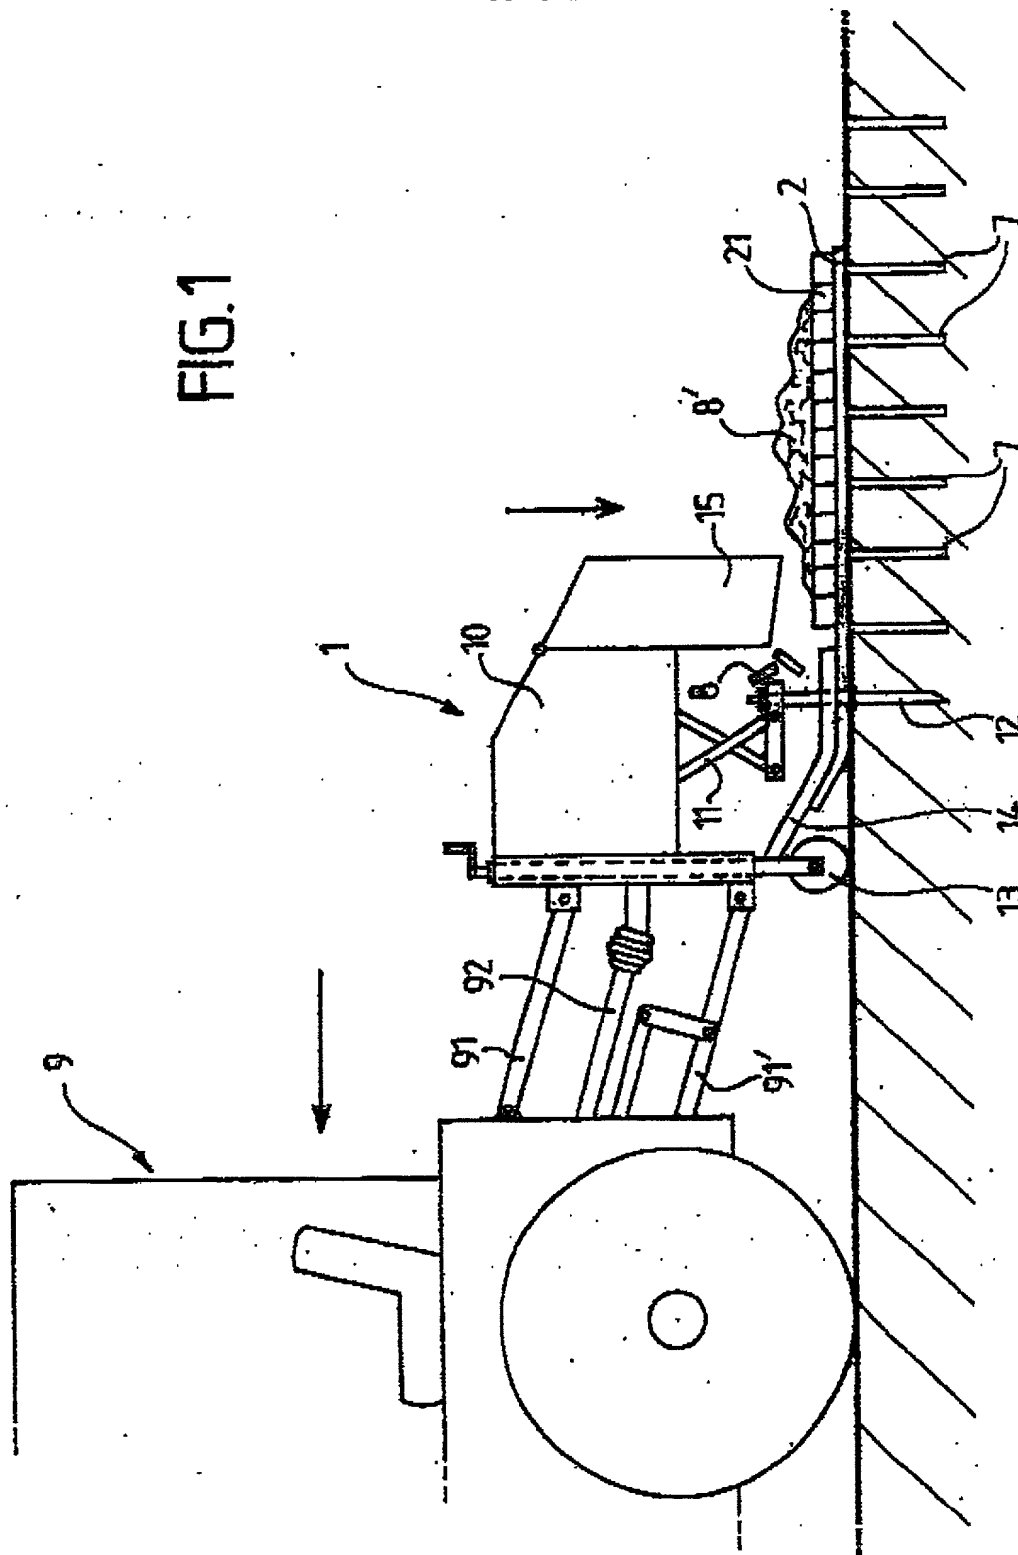


FIG. 2

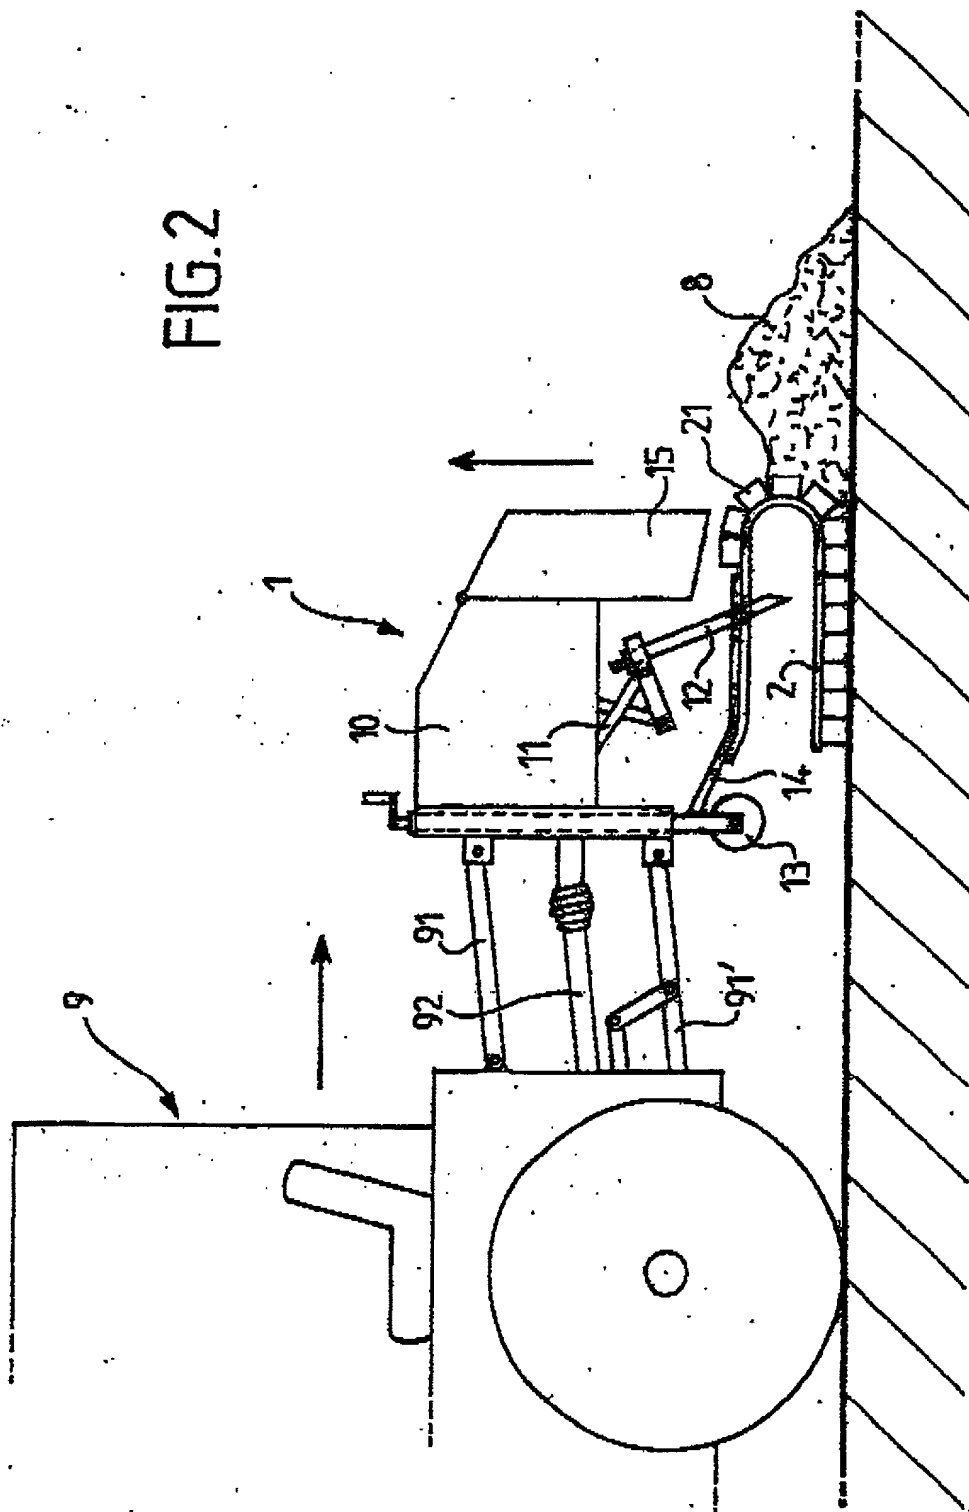

3/10

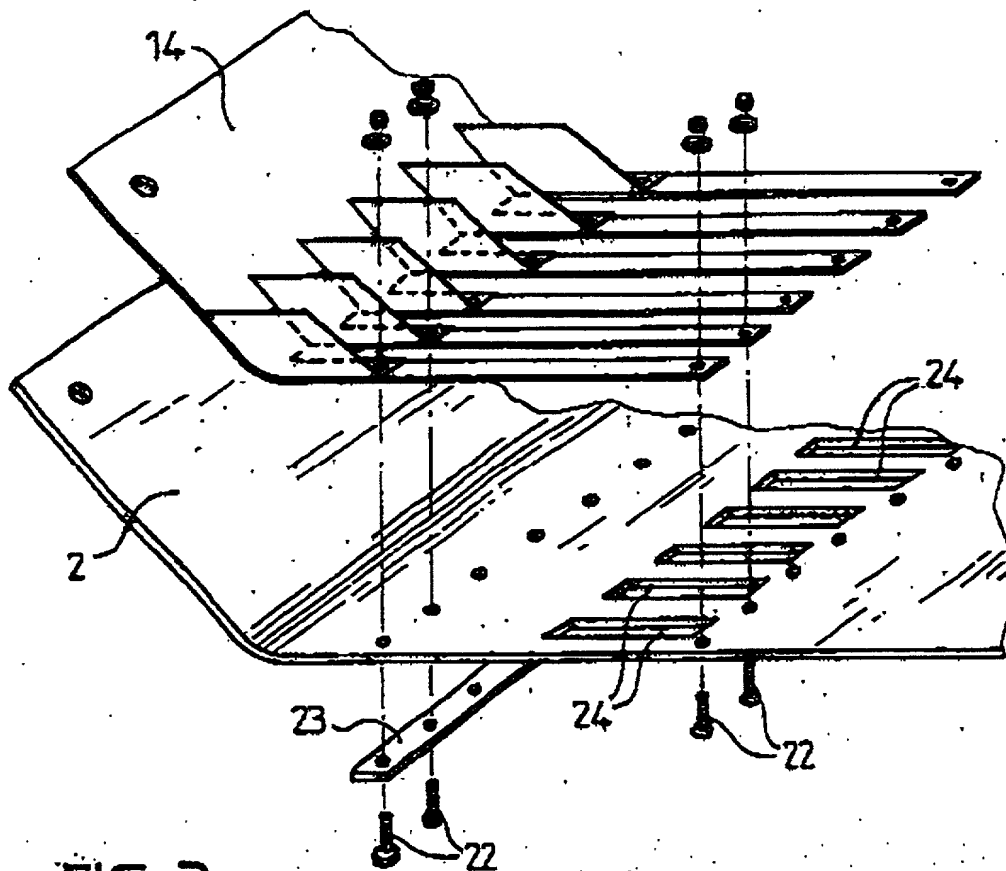


FIG. 3

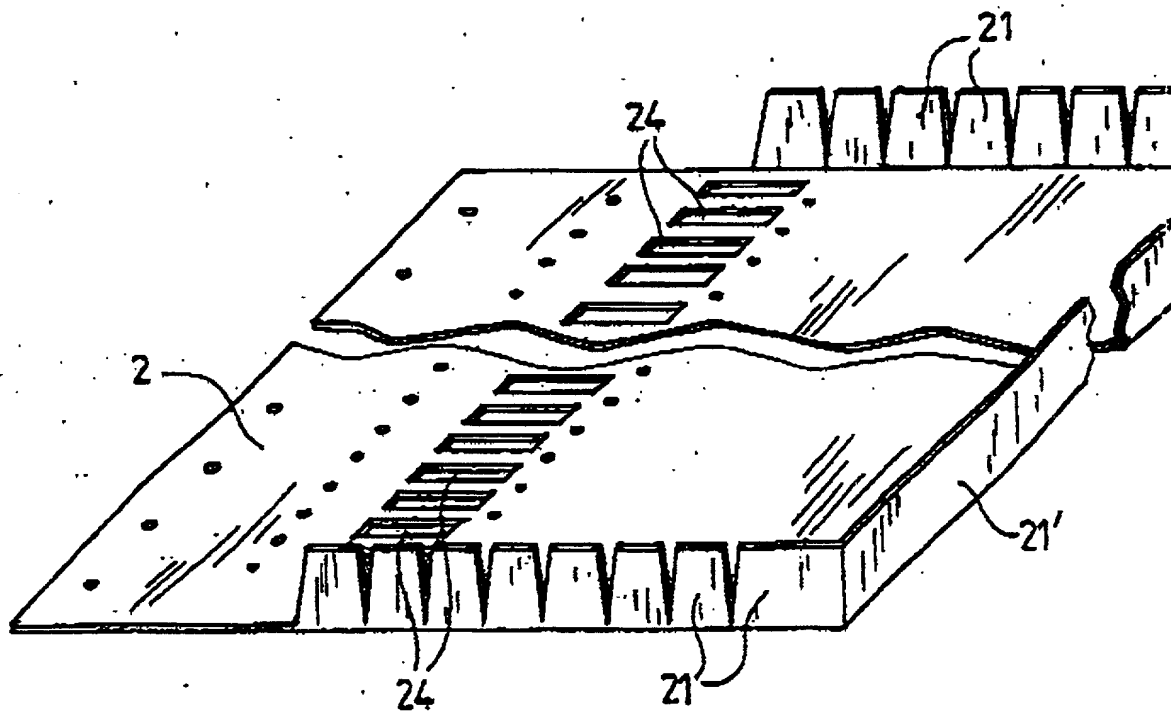


FIG. 4

FEUILLE DE REMPLACEMENT (REGLE 26)

4/10

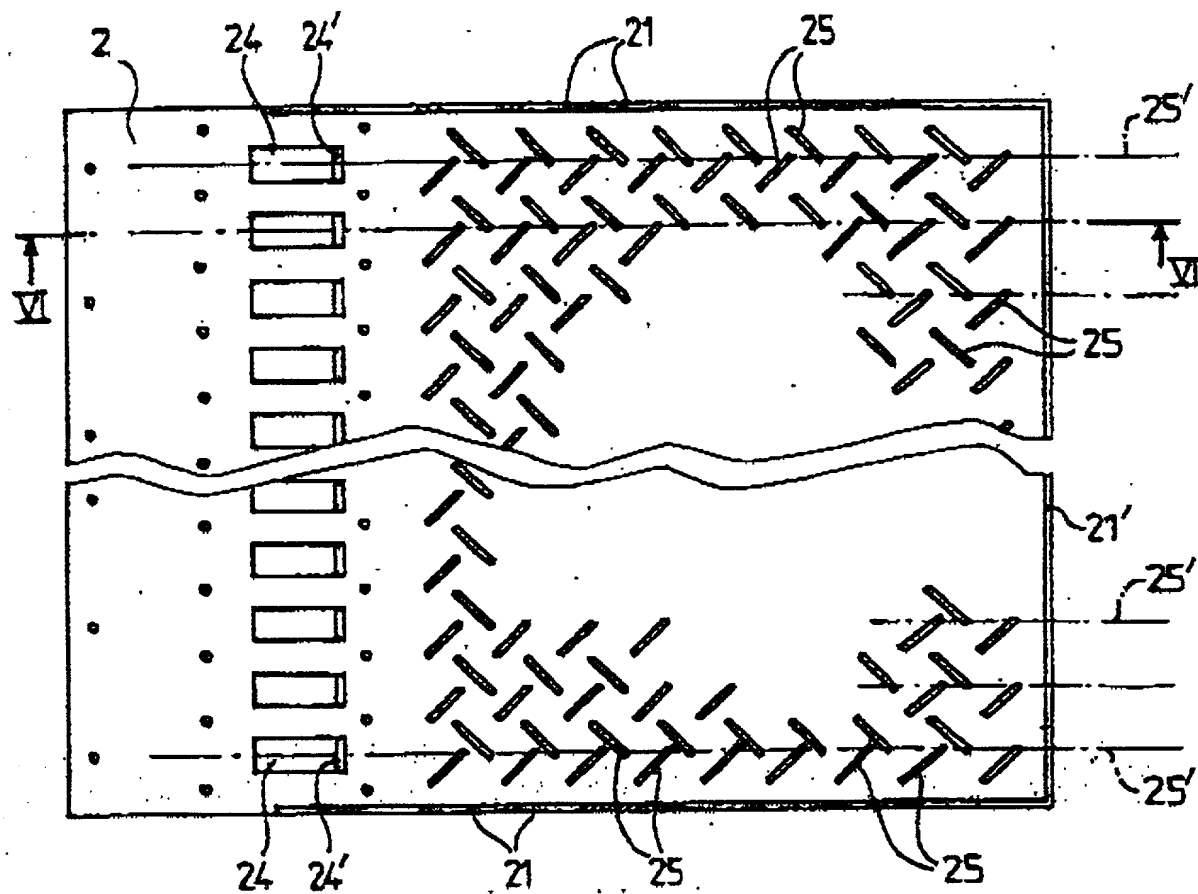


FIG. 5



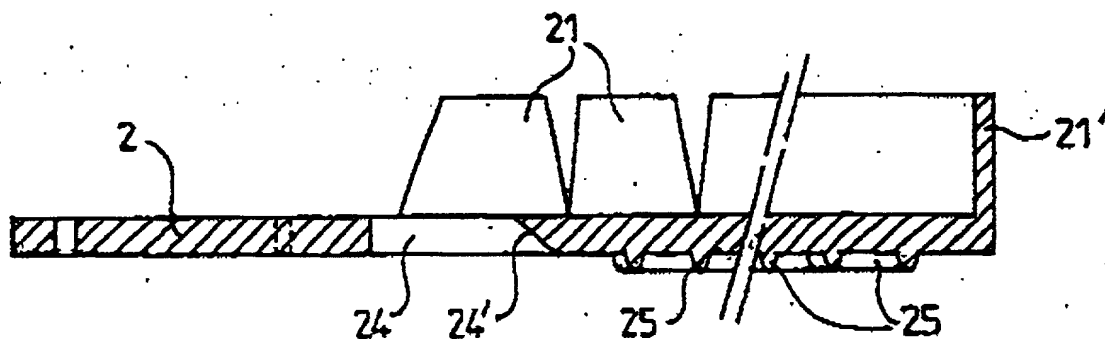


FIG. 6

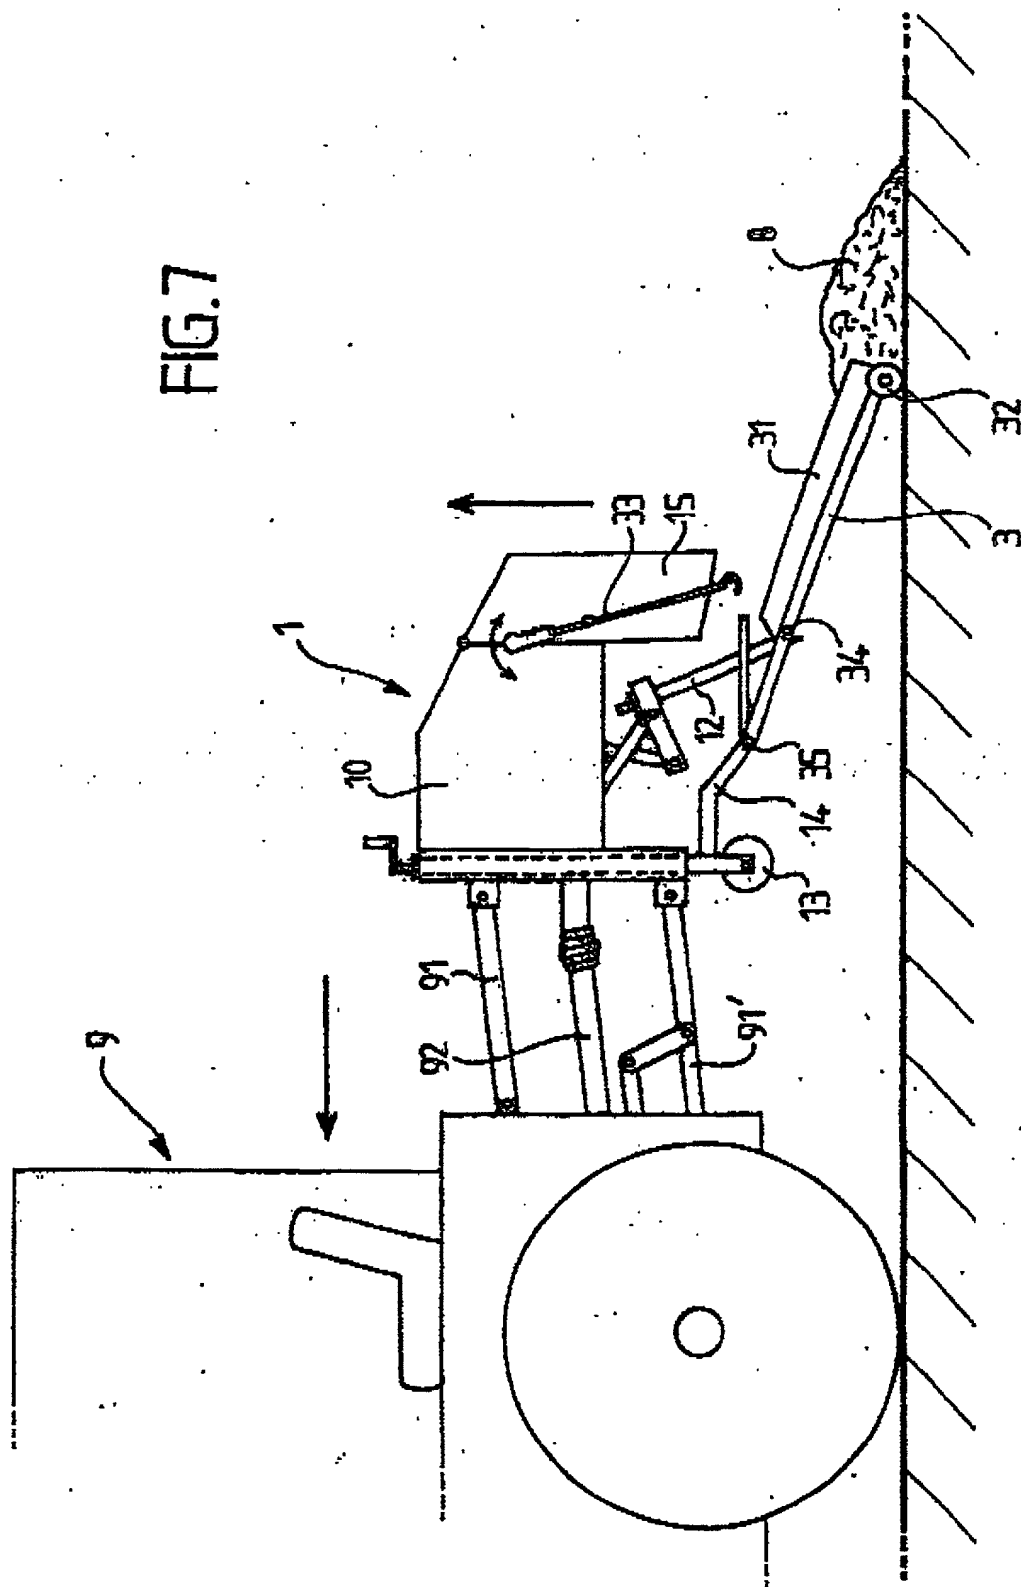

6/10

FIG.8

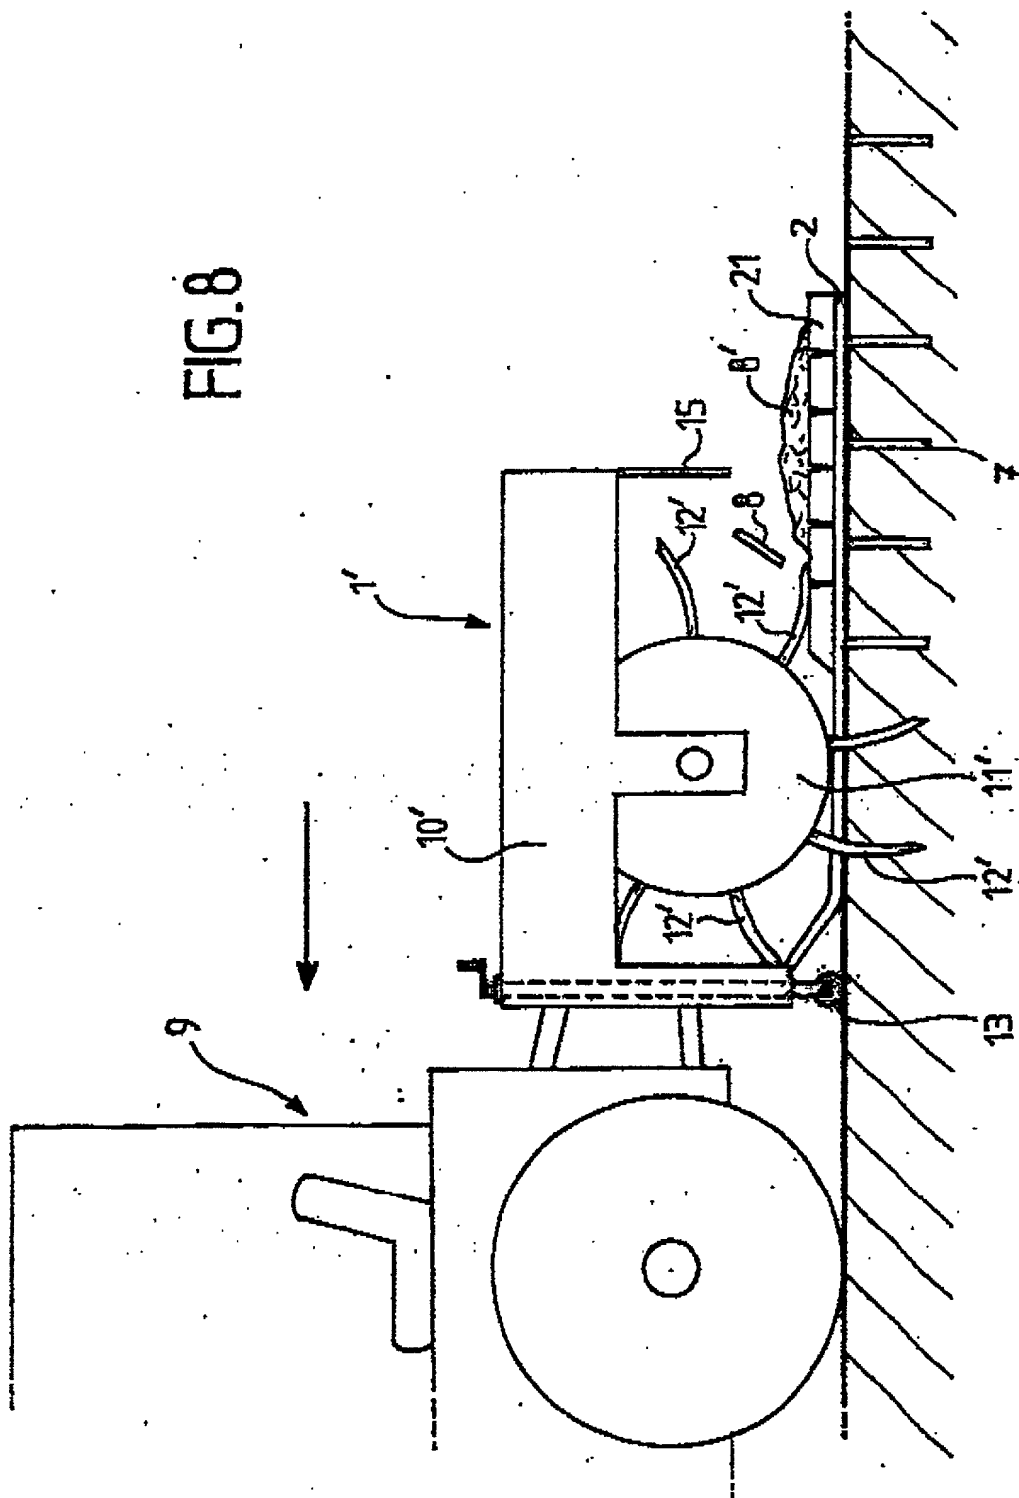

7/10

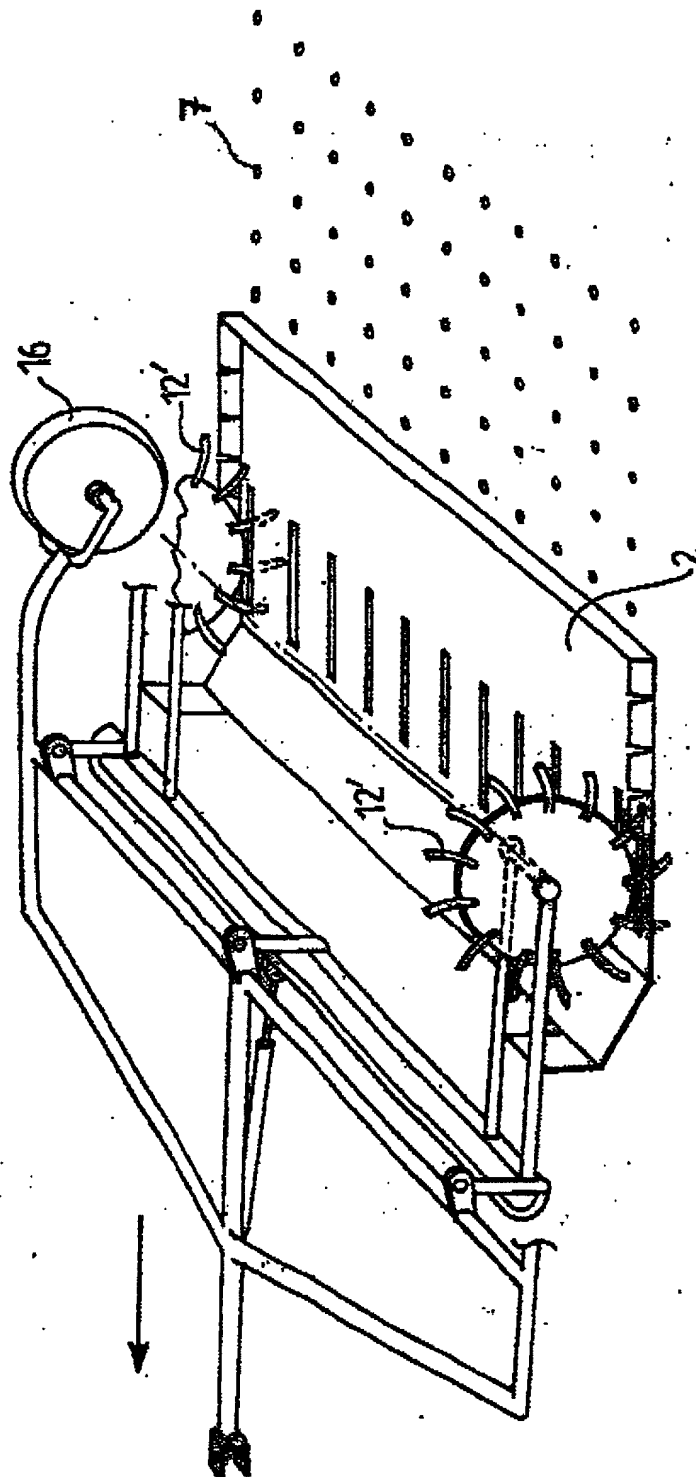


FIG. 9

FEUILLE DE REMPLACEMENT (REGLE 26)

8/10

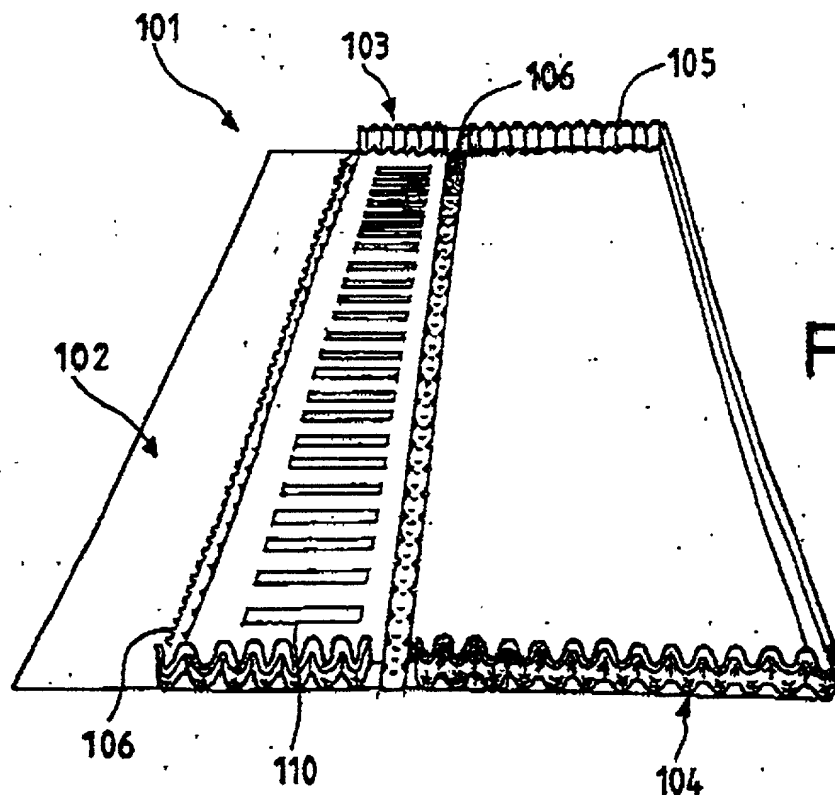


FIG. 10

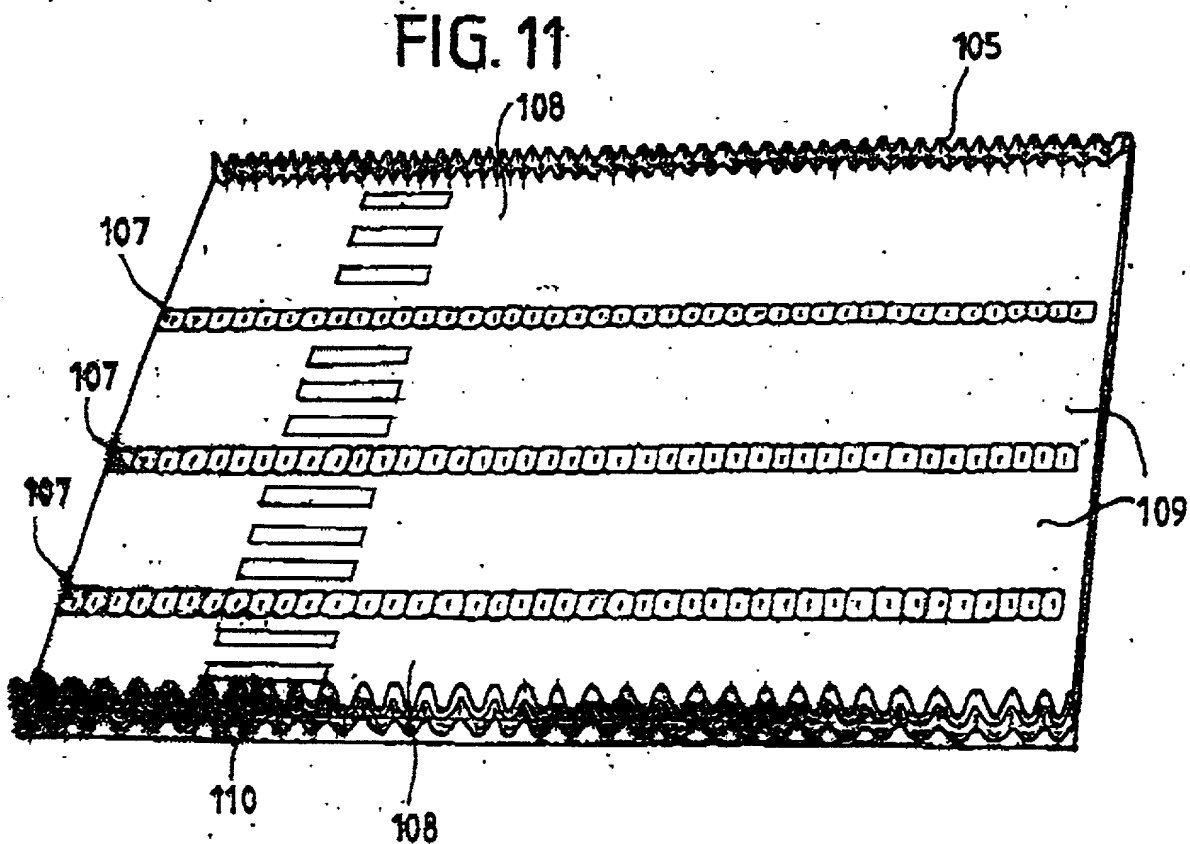


FIG. 11

9/10

FIG. 12



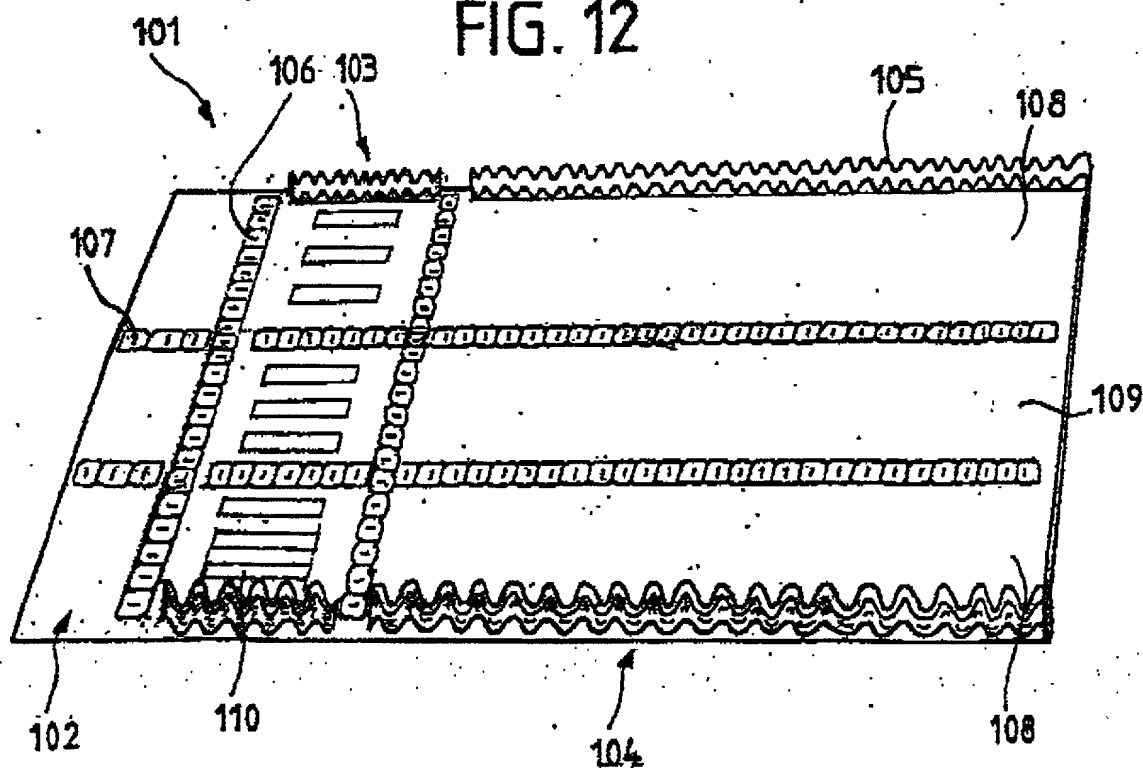


FIG. 13

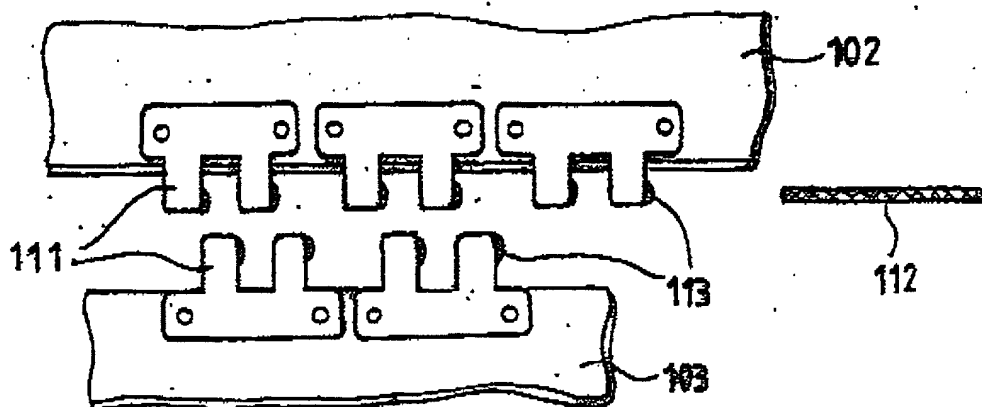

10/10

FIG. 14

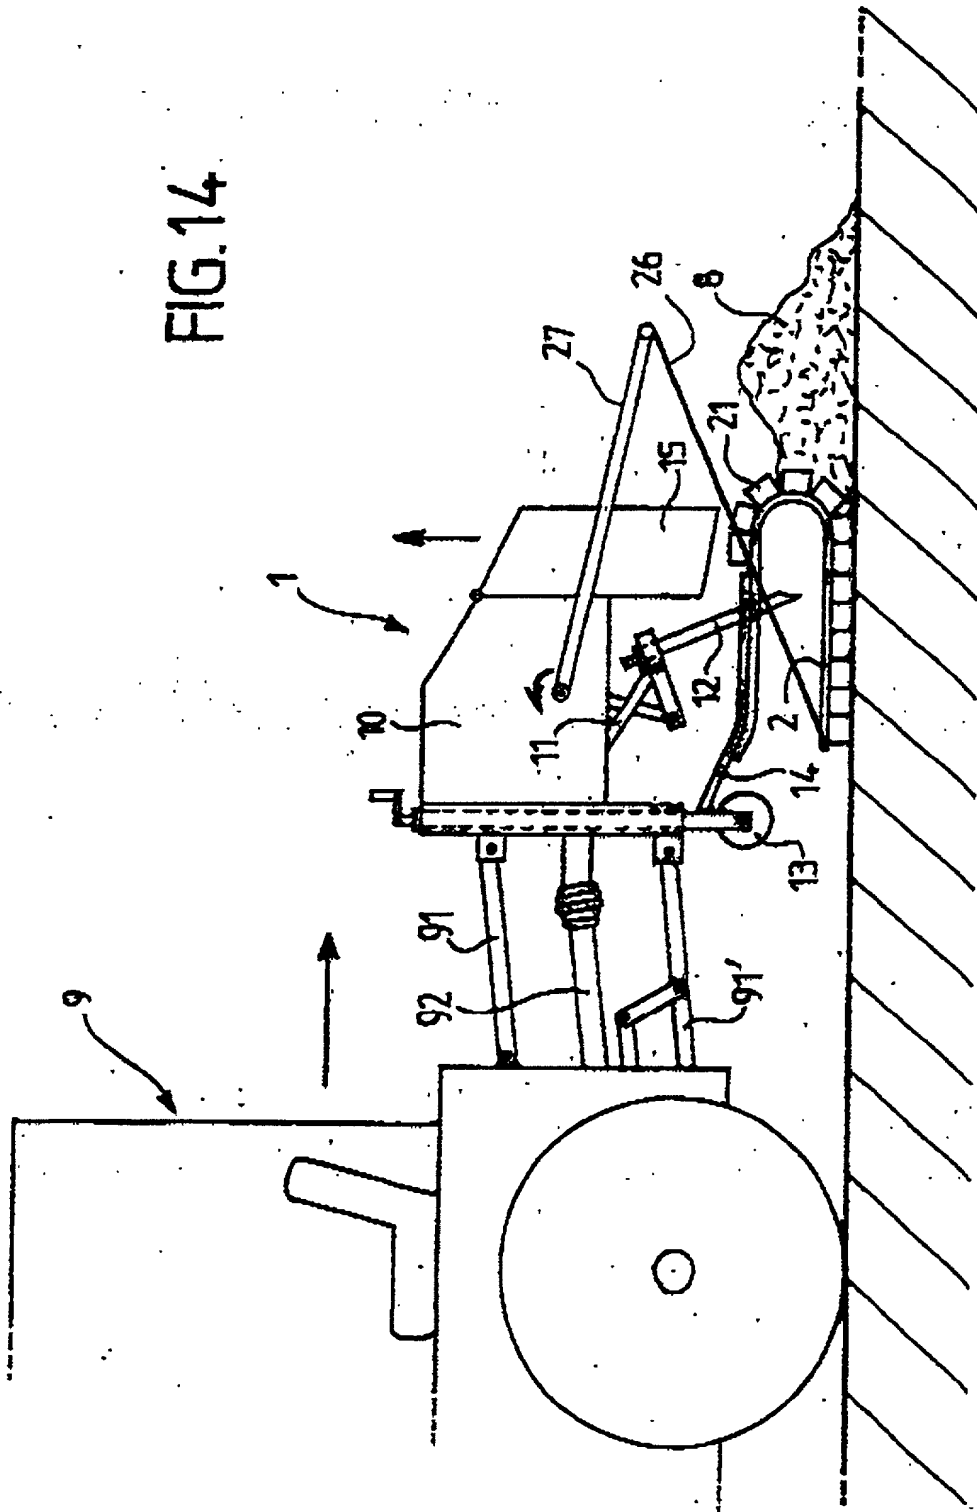

33(0)1 53 04 64 00

Ref. _____

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Device and method for treating the soil by aeration with waste storage

the specification of which: *(check one)*

REGULAR OR DESIGN APPLICATION

☐ is attached hereto.

☐ was filed on _____ as application Serial No. _____
and was amended on _____
(if applicable).

PCT FILED APPLICATION ENTERING NATIONAL STAGE

☒ was described and claimed in international application No. PCT/FR00/01678 filed on the 16th June 2000
and as amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

PRIORITY CLAIM

I hereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATION(S)

| Country | Application Number | Date of Filing (day, month, year) | Priority Claimed |
|---------|--------------------|--------------------------------------|------------------|
| FRANCE | 99 07782 | 18th June 1999 | Yes |
| FRANCE | 00 00608 | 18th January 2000 | Yes |

(Complete this part only if this is a continuing application.)

I hereby claim the benefit under 35 USC 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status—patented, pending, abandoned)

33(0) 1 53 04 64 00

POWER OF ATTORNEY

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from _____ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

As a named inventor, I hereby appoint the following attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Robert J. PATCH, Reg. No. 17,355, Andrew J. PATCH, Reg. No. 32,925, Robert F. HARGEST, Reg. No. 25,590, Benoît CASTEL, Reg. No. 35,041, Eric JENSEN, Reg. No. 37,855, and Thomas W. PERKINS, Reg. No. 33,027, c/o YOUNG & THOMPSON, Second Floor, 745 South 23rd Street, Arlington, Virginia 22202.

Address all telephone calls to Young & Thompson at 703/521-2297.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Noël GABARD
(given name, family name)

Inventor's signature _____

Date 14 Decembre 2001

Residence: 60 rue du 19 janvier, 92380 GARCHES
France

Citizenship: French

Post Office Address: as above

FRX

Full name of second joint inventor, if any:
(given name, family name)

Inventor's signature _____

Date _____

Residence: _____

Citizenship: _____

Post Office Address: _____

Full name of third joint inventor, if any:
(given name, family name)

Inventor's signature _____

Date _____

Residence: _____

Citizenship: _____

Post Office Address: _____